




New!

**14.9_{psi} Flare Knock Out
Double Wall Pressure Vessel**

***Extend your
service life...***

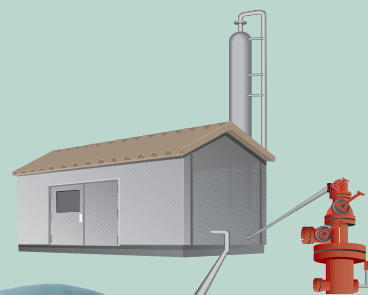

ZCL FKO Pressure Vessel

Simply will not corrode!



Manufactured to API-12P guidelines and meets AEUB's G-55
"Storage Requirements for the Upstream Petroleum Industry."

Aboveground secondary containment.

Double wall pressure vessel designed to remove liquids from flare gas streams



Canada's #1 fiberglass
tank manufacturer.

14.9psi Flare Knock-Out Pressure Vessel

Double wall pressure vessel designed to remove liquids from flare gas streams

Save money, make your equipment an asset rather than a consumable!

ZCL's new 14.9psi, (non code) Flare Knock Out Vessel allows you to comply with current environmental regulations, while greatly reducing your risk of expensive leak-related clean-ups over the long haul. Operation-ready, it does not require any dikes or liners and meets G-55 regulatory guidelines for safe containment.

The filament wound, resin rich double wall construction provides a superior corrosion resistant fiberglass vessel that will stand up to the harshest oilfield conditions.

Safe, durable technology, with quality components. Everything the oil patch has come to expect from ZCL's products, plus more than twice the service life of bare steel tanks.



The corrosion free advantage...

Corrosion Free...100% premium grade double wall Fiberglass Reinforced Plastic (FRP) construction (no filler) provides corrosion free internal and external service.

- Corrosion resistant to produced water and most chemicals
- Operation-ready— quick and easy set-up
- Easy to move and reuse— ½ the weight of other tanks
- Does not require dikes or liners

Meets G-55 regulatory guidelines for safe containment



Easily accessible inlet and discharge piping.



Additional features include: concrete pad with bolts in place, liquid level gauge, battery cables, ground wire and a flex connector hose.

- 14.9psi Filament wound fiberglass primary storage and 100% secondary containment
- Gas fired integral heating system
- Engineered precast concrete mounting pad or optional skid frame assemblies
- Static electricity grounding system
- Moveable and reusable
- Urethane foam insulation with UV inhibitor coating
- Corrosion resistant to produced water & most chemicals
- "Go-No-Go" leak indicator
- Enclosed inlet and outlet piping assembly
- Integral 1 to 1 mechanical EZ-Read level gauge
- Minimal site preparation required
- Choice of 50BBL or 100BBL

User friendly, peak performance...

Years of valuable customer input has resulted in tank designs that are perhaps the most user friendly on the market!

Incorporating dozens of suggestions from oilfield experts, the ZCL Flare Knock-Out Vessel is easy to use, safe for the environment and will last longer than other above-ground pressure vessels.

ZCL
COMPOSITES INC.



Visit Our Web Site: www.zcl.com
Call Us Today 1-800-661-8265