

ZCL
COMPOSITES INC.



GREENTANK
TM

**Single Wall
Underground
Storage Tanks**

ZCL
COMPOSITES INC.



The rust-proof,
maintenance free
choice



GREENTANK SINGLE WALL TANKS fulfill all the requirements of safe single containment for underground storage of petroleum products, hazardous and non-hazardous liquids, sewage and some chemicals.

GREENTANK SINGLE WALL TANKS are lightweight and strong.

Every **GREENTANK** petroleum storage tank will provide long, trouble-free service.

GREENTANK SINGLE WALL TANKS' standards meet or exceed the performance standards required by Underwriters Laboratories of Canada – ULC-S-615-98.

Comprehensive warranty



Your **ZCL** Advantages ...

Greentank Single Wall Storage Tanks


Corrosion-free ... Fibreglass tanks are made of corrosion-resistant 100% resin and fibreglass reinforced plastic. Provides corrosion-free internal and external service.

Maintenance free ... No expensive cathodic or impressed current protection systems required.

Easy to handle ... Thanks to the Greentank lightweight design, there is no need for heavy cranes, resulting in reduced installation costs.

Long-term asset ... ZCL Greentanks are reuseable. After many years of trouble-free service, tanks can be moved and reused.

Specifications SINGLE WALL TANKS

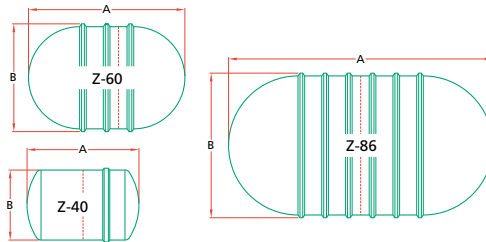

MODEL # & Nominal Capacity	Actual Capacity	Dimension (mm)		Nominal Weight (kg)
		A	B	
Z40SW – 2,500 L	2,539 L	2,295	1249	182
Z40SW – 5,000 L	5,073 L	4,368	1249	295
Z60SW – 5,000 L	5,080 L	2,578	1930	202
Z60SW – 10,000 L	10,066 L	4,500	1930	380
Z60SW – 15,000 L	15,314 L	6,523	1930	567
Z60SW – 20,000 L	20,250 L	8,426	1930	734
Z60SW – 25,000 L	25,055 L	10,279	1930	788
Z80SW – 15,000 L	15,123 L	3,980	2590	620
Z80SW – 20,000 L	20,440 L	5,084	2590	740
Z80SW – 25,000 L	25,146 L	6,061	2590	860
Z80SW – 30,000 L	30,701 L	7,209	2590	980
Z80SW – 35,000 L	35,138 L	8,135	2590	1160
Z80SW – 40,000 L	40,913 L	9,334	2590	1300
Z80SW – 45,000 L	45,833 L	10,361	2590	1500
Z80SW – 50,000 L	50,172 L	11,256	2590	1610

Technical Features and Support

Safe storage of ... Flammable and combustible liquids, oxygenated fuels, hazardous and non-hazardous fluids, potable and non-potable water, sewage and a variety of chemicals.

Sturdy and reliable ... Engineered to withstand H-20 axle loading of 32,000 pounds per axle, ZCL single wall tanks' integral rib/tank interface (no rib delamination) for added tank strength allows burial to a depth of seven feet in wet or dry soil conditions.

Cost-effective multi-compartments ... Greentank single-wall tanks can be built to store two or more products in the same tank. Our in-house engineers will help you with your custom requirements.

Stringent Performance Standards ... All tanks are subjected at the factory to 5 psi air/soap pressure test and vacuum-tested to 11.5 inches of mercury.

Optional Accessories

Concrete anchor system: Anchor system consists of concrete anchors, fibreglass reinforced plastic hold-down straps and necessary hardware to attach straps to anchor.

Manway: Manways come in various sizes: 22" i.d., 24" i.d., & 30" i.d., and come complete with gaskets, bolts and covers.

FRP Manway extensions are available.

Gauge plates are installed under each service fitting and manway opening.

FRP Containment sumps (risers) are manufactured with 100% of the same material as the tanks. Each sump is field-bonded to a factory-installed FRP skirt.

**For more information,
call toll free 1-800-661-8265**

ZCL
COMPOSITES INC.

